

# GREASE SEPARATORS

## To install in SAND

### WITHOUT MUD TRAP

Ref.	Foto	Volume L	Mud. V	Flow rate L/s	A H.	C L.	B W	E H in	G H out	F In/out	Weight kg
VV2/01/2	1	1.100	-	1.5	1.910	1.180	1.180	1.250	1.200	110	50
VV2/03/2	1	1.600	-	3	2.250	1.290	1.290	1.500	1.450	110	60
VV2/06/2	2	2.400	-	6	1.850	2.350	1.350	1.220	1.180	125	110
VV2/08/2	2	2.400	-	8	1.850	2.350	1.350	1.220	1.180	125	110
VV2/10/2	2	3.300	-	10	2.210	2.390	1.610	1.450	1.400	160	180
VV2/15/2	2	3.300	-	15	2.210	2.390	1.610	1.450	1.400	160	180
VV2/20/2	2	6.000	-	20	2.470	2.400	2.070	1.850	1.800	200	270

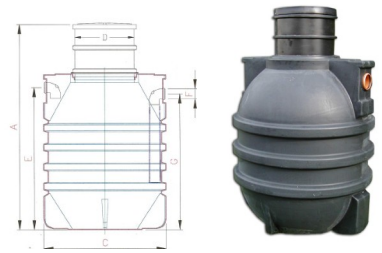


FOTO 1

### WITH INTEGRATED MUD TRAP

Ref.	Foto	Volume L	Mud V	Flow rate L/s	A H.	C L.	B W	E H in	G H out	F In/out	Weight kg
VVS2/06/2	2	2.400	1.200	6	1.850	2.350	1.350	1.220	1.180	125	110
VVS2/08/2	2	2.400	1.200	8	1.850	2.350	1.350	1.220	1.180	125	110
VVS2/10/2	2	3.300	1.600	10	2.210	2.390	1.610	1.450	1.400	160	180
VVS2/15/2	2	3.300	1.600	15	2.210	2.390	1.610	1.450	1.400	200	180
VVS2/20/2	2	6.000	3.000	20	2.470	2.400	2.070	1.950	1.800	200	270




FOTO 2



### WITH BUILD ON MUD TRAP

Ref.	Foto	Volume L	Mud. V	Flow rate L/s	A H.	C L.	B W.	E H in	G H out	F In/out	Weight kg
VVAS2/01/2	3	2.200	1.100	1.5	1.910	2.260	1.180	1.250	1.200	110	110
VVAS2/03/2	3	3.200	1.600	3	2.250	2.580	1.290	1.500	1.450	110	120

The dimensions are in mm and subject to alteration.

- Grease separator in polyethylene HD, fabricated by rotomoulding.
- Existing of 1 monoblok, corrosion resistant.
- The effluent goes via a water tight outlet to the sewer. Grease stays in the tank.
- Designed according DIN 4040 and EN 1825-1
- The in and outlet are in PVC in a watertight sealing, and a cover of 600 mm.
- The installation is equipped with a riser of 600 mm.
- Installation according to the prescription of the manufacturer in sand.
- The separator and its parts are in polyethylene.
- The separator is guaranteed watertight.
- Also a sample pit is available. It is equipped with a spoon, and have connections of 110 and 125 mm.



FOTO 3

**Boralit NV**

Nijverheidslaan 12 B-9880 Aalter - Belgium—2017

Tél.: + 32 (0)9 375 11 11 Fax: +32 (0)9 375 22 22

E-mail: sales@boralit.com

www.boralit.com

**BORALIT**

plastic tank solutions