

PUMPING STATIONS IN POLYETHYLENE PEDROLLO— MCm 10/45 and MCm 15/45

WITH 1 and 2 PUMPS, SMALL FLOW RATES, WASTE WATER, PEDROLLO MCm10/45 and MCm15/45

Ref.	Diam	H.	Diam IN	Diam out	H In	H out	Manhole	Weight	N° pumps	Voltage	Consumpn
PP850/1/MCm 10/45	930	1.680	110	50/63	1.100	1.350	600	70	1	230	0,750
PP850/2/MCm 10/45	930	1.680	110	50/63	1.100	1.350	600	90	2	230	1,100
PP850/1/MCm 15/45	930	1.680	110	50/63	1.100	1.350	600	71	1	230	1,100
PP850/2/MCm 15/45	930	1.680	110	50/63	1.100	1.350	600	92	2	230	2,200


Model PEDROLLO MCm 10/45

For pumping very slightly polluted water.
Free opening max: 50 mm.
Minimum vacuum height: 14 mm.
Enclosure, filter and impeller in techno polymer.
Motor mono 230V (50hz), 2900 tr/min, IPX8, class F.
Double housing, motor cooled by the pumped liquid.
Axis stainless steel EN 10088-3
internal motor housing stainless steel AISI 304.
Double seal and oil bath.
Float switch and thermal safety.
Delivered with 10 m cable.
Maximum liquid temperature: 40°C
Maximum head 11 meter
Maximum flow rate 600 l/min.
Equipped with control unit with alarm
Equipped with sieve basket at the inlet

Model PEDROLLO MCm 15/45

For pumping very slightly polluted water.
Free opening max: 50 mm.
Minimum vacuum height: 14 mm.
Enclosure, filter and impeller in techno polymer.
Motor mono 230V (50hz), 2900 tr/min, IPX8, class F.
Double housing, motor cooled by the pumped liquid.
Axis stainless steel EN 10088-3
internal motor housing stainless steel AISI 304.
Double seal and oil bath
Float switch and thermal safety.
Delivered with 10 m cable.
Maximum liquid temperature: 40°C
Maximum head 14 meter
Maximum flow rate 750 l/min.
Equipped with control unit with alarm
Equipped with sieve basket at the inlet

These pumps are suitable for rainwater with small pollution, such as mud in emptying building sellers, water after a water treatment plant, ...

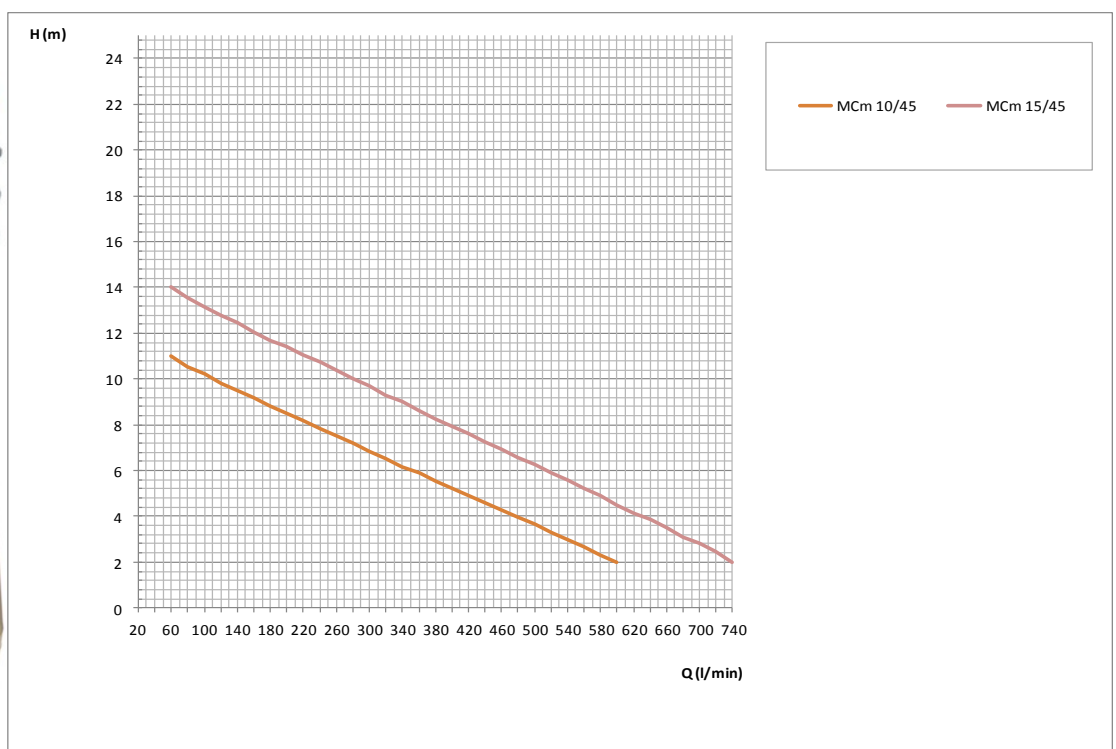

Boralit NV—Version 2017

Nijverheidslaan 12, BE 9880 Aalter—Belgium—2015

Tel: +32 (0)9 375 11 11 Fax: +32 (0)9 375 22 22

E-mail: sales@boralit.be

www.boralit.com

BORALIT

plastic tank solutions